Artec Ray II

Lightning-fast long-range 3D scanner for professional captures with high accuracy







Reverse engineering



Inspection



Civil infrastructure



Forensics



Heritage preservation





Speed

Capture a full dome at highest resolution in 1.7 mins.




Accuracy

Expect data with an uncompromised 3D point accuracy of 1.9 mm from 10 meters.



Resolution

No details missed at a resolution of 3 mm at 10 meters.

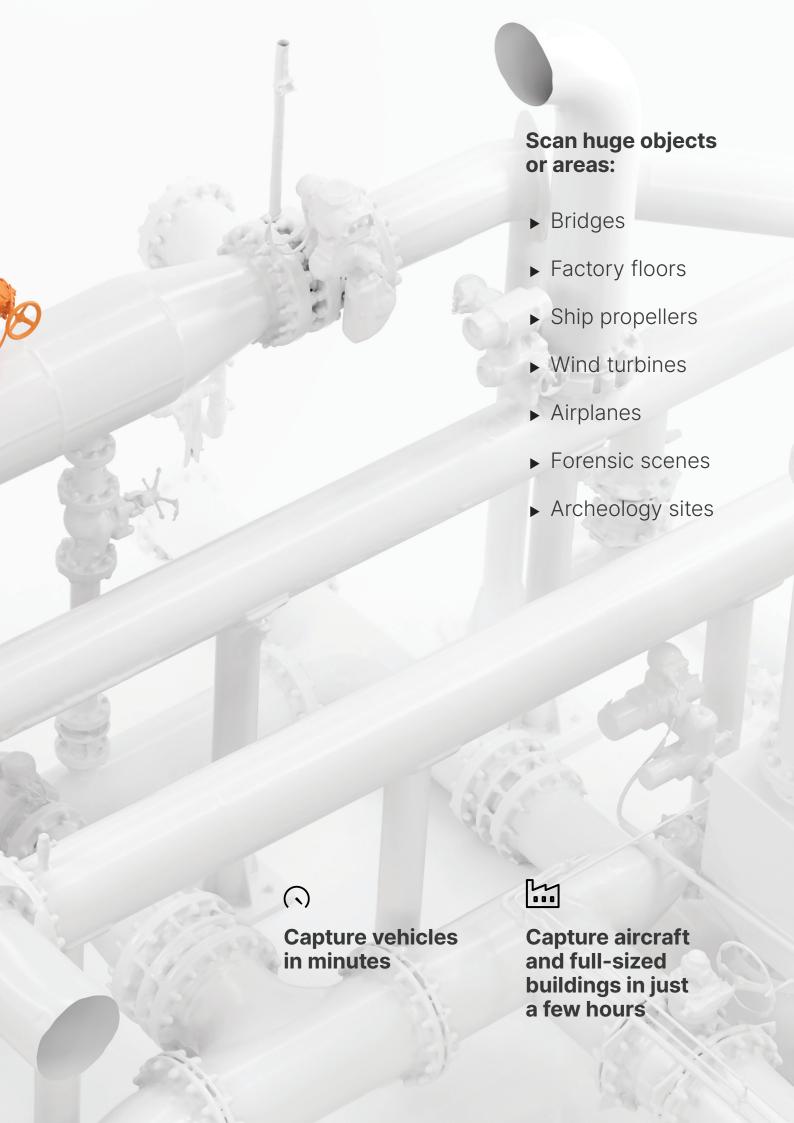

Metrology-grade precision

Artec Ray II scans with high 3D point accuracy and best-in-class angular accuracy.

	@10m	1.9 mm
3D point accuracy	@20m	2.9 mm
	@40m	5.3 mm
Angular accuracy	0.87 mm @10m (or 18")	
Range accuracy	1.0 mm + 10 ppm	
Range noise	0.4 mm @ 10m — 0.5mm @ 20m	



Check & Adjust

If your device isn't perfectly calibrated, your scanner will either automatically calibrate itself by scanning the surroundings, or let you know if further action is required.



Accuracy certificates

Scan with full confidence knowing that your scanner has been verified to fall within specifications.



Declaration of conformity

Your scanner has been rigorously tested and is guaranteed to conform to the required list of 11 European safety standards.

Brilliant texture

Detect even the smallest surface irregularities with Ray II's 36 MP 3-camera system, with brilliant HDR texture.



Lifelike replicas

In heritage preservation, Ray II enables the recreation of every detail in true-to-life color.



For critical evidence

In forensic applications, enhanced color accuracy facilitates identifying crucial evidence such as bloodstains.



Fast & easy

Artec Ray II captures data at a remarkable 2 million pts/s.

resolution	3 mm	6 mm	12 mm
without texture	1.7 min	0.85 min	0.4 min
with texture	2.7 min	1.9 min	1.4 min

Onboard control

Fuss-free scanning is ensured with the intuitive Ray II — with basic features accessible on board, it's as simple as pressing a button, with no computer or other device needed.



Portable and quick to set up

At just 5 kg including the tripod, Ray II needs no targets and is ready for full setup in mere seconds.





Remote scanning

When scanning something large, in an inaccessible location, or at a height you can't safely be on, control your scanner easily and from a distance with the Artec Remote App.



Automatic removal of moving objects

Ray II's smart auto-removal of moving objects that may enter or exit the scene keeps all captured data focused on exactly what you need.



Real-time registration on board

Track the scanner's movement in real time with feature tracking and advanced algorithms for intuitive 3D-space navigation including Ray II's Visual Inertial System (VIS), Altimeter, compass, and Global Navigation Satellite System.



Continuous supply battery system

Powered by two hot-swappable batteries and another two on standby, Ray II comes ready to scan for a full 8 hours. Need more time? Charge while you scan, and swap without any downtime.



Comprehensive long-range capture

With Ray II, the expansive 360°-300° field of view gives you flexibility to capture objects from 0.5 to 130 meters away, and with high accuracy and superior quality.



Water and dust protection: IP54 (IEC 60529)

Your scanner is protected and your work kept safe with the Ray II's water and dust protection, designed to keep particles or humidity from getting into your device.

Perfect match for Leo


Exceptionally well-suited for use with the wireless powerhouse Artec Leo, the duo can quickly capture large or even massive objects with high accuracy and full coverage.

Power couple

An unbeatable combination of two smart, wireless scanners: Artec Ray II's range and speed for full scenes and large objects, the handheld Artec Leo for specific areas and angles.

All Artec 3D scanners


The long-range Ray II also integrates with all other Artec 3D scanners in seconds.

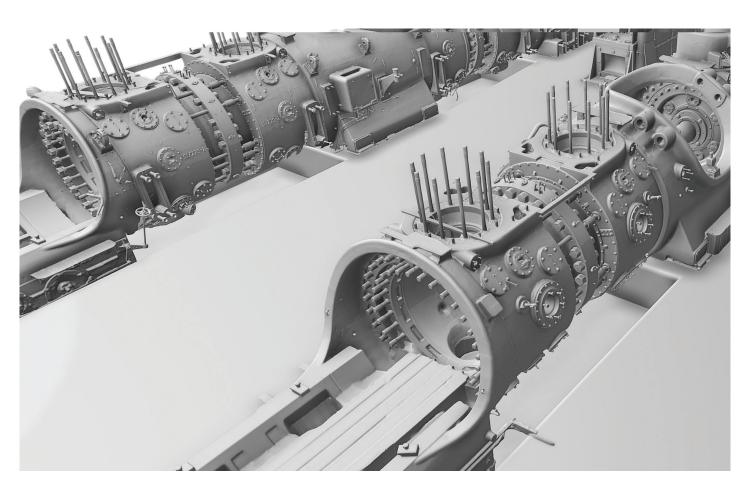

Export

Scan-to-CAD export

Upload to Artec Studio to precisely position and fit your scans with CAD primitives, then export to SOLIDWORKS or other CAD software – or for inspection, directly to Control X for in-depth reports.

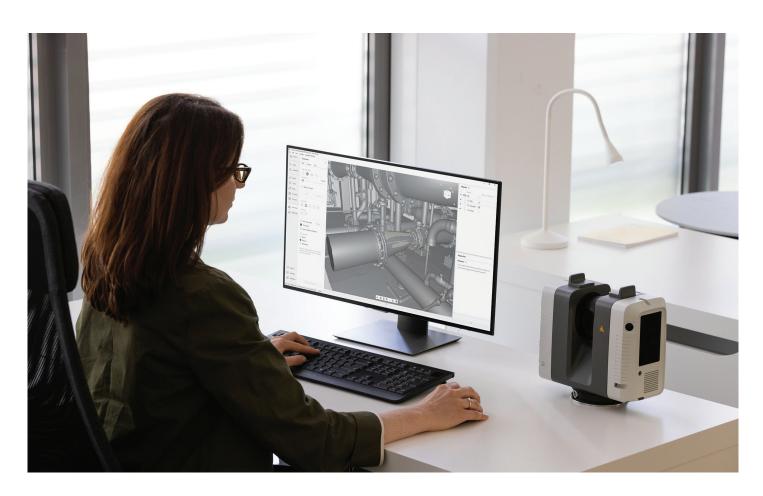

Specifications

Accuracy & resolution		
3D point accuracy	1.9 mm @ 10 m 2.9 mm @ 20 m 5.3 mm @ 40 m	
Angular accuracy	18" (0.87 mm @ 10 m)	
Range accuracy	1.0 mm + 10 ppm	
Resolution	3 user selectable settings: 3 / 6 / 12 mm @ 10 m	
Range noise ^{1 2}	0.4 mm @ 10 m 0.5 mm @ 20 m	
Field of view & range		
Field of view	360° (horizontal) / 300° (vertical)	
Range	0.5 — 130 m	
Speed		
3D capture rate	Up to 2,000,000 pts/sec	
Scanning time without texture @ 10 m	1.7 min @ 3mm resolution 0.85 min @ 6mm resolution 0.4 min @ 12mm resolution	
Scanning time with texture @ 10 m	2.7 min @ 3mm resolution1.9 min @ 6mm resolution1.4 min @ 12 mm resolution	
Color capture		
Camera	36 MP 3-camera system captures 432 MPx raw data for calibrated 360° \times 300° spherical image	
HDR	Automatic, 5 brackets	
Operation		
On scanner	Touchscreen control with finger touch, full color WVGA graphic display 480×800 pixels	
Mobile devices	Artec Remote app for iOS and Android tablets and smartphones including: • Remote control of scan functions • Settings selection • Launch scanning	
Algorithms		
Real time registration	Automatic point cloud alignment based on real time tracking of scanner movement between setups based on Visual Inertial System (VIS) by video enhanced inertial measurement unit	
Automatic removal of moving objects	Delete captured data of moving objects using Double Scan	
Check & Adjust	Field procedure for targetless checking of angular parameters	

Navigation sensors		
Visual Inertial Systems	Video enhanced inertial measuring system to track movement of the scanner position relative to the previous setup in real time	
Tilt	IMU based, Accuracy: 18" (for upright and upside down setups with +/- 10° inclination)	
Geolocation sensors	Altimeter, Compass, Global Navigation Satellite System	
Interfaces		
Wireless	Integrated wireless LAN (802.11 b/g/n)	
Data storage	AS256, 256 GB exchangeable USB 3.0 flash drive	
Hardware specifications		
Scanning technology	Time of flight enhanced by Waveform Digitising (WFD) technology	
Laser class	1 (in accordance with IEC 60825-1:2014), 1550 nm (invisible)	
Dimensions	120 mm × 240 mm × 230 mm / 4.7" × 9.4" × 9.1"	
Weight	5.35 kg / 11.7 lbs, nominal (without batteries)	
Mounting mechanism	Quick mounting on 5/8" stub on lightweight carbon tripod or tripod adapter	
Power		
Internal battery	2 × AEB364 internal, rechargeable Li-lon batteries Duration: Typically up to 4 hours Weight: 340 gr. per battery	
External	GEV282 AC adapter	
Environmental		
Operating temperature	-5° to +40°C	
Storage temperature	-40° to +70°C	
Operating low temperatures ³	-10° to +40°C	
Dust/Humidity ⁴	Solid particle/liquid ingress protection IP54 (IEC 60529)	

¹ At 89% albedo

² For single-shot measurements

³ Extended low temperature operation is possible to -10°C if internal temperature is at or above -5°C when powered on. For extended low temperature measurement, it is recommended that QA procedures are followed.

 $^{^4}$ For upright and upside down setups with a +/- 15° inclination



Luxembourg USA Montenegro China Japan Tower A, Zhongyi Building, 580 West Nanjing Road, Jing'an District, Shanghai Petovica Zabio bb., Utjeha, 85000 Bar 4 Rue Lou Hemmer, 2880 Lakeside Drive, #135 Gran Biz Shibadaimon F1, L-1748 Senningerberg, Santa Clara, CA 95054 1-2-4, Shibadaimon, Luxembourg Municipality Minato-ku, Tokyo +352 2 786-1074 +1 669-248-8601 +382 67 146 005 +81 080 1680 0727